




CRANE REMOTE CONTROL




www.wieltra.com

EVO 204 REMOTE CONTROL UNITS

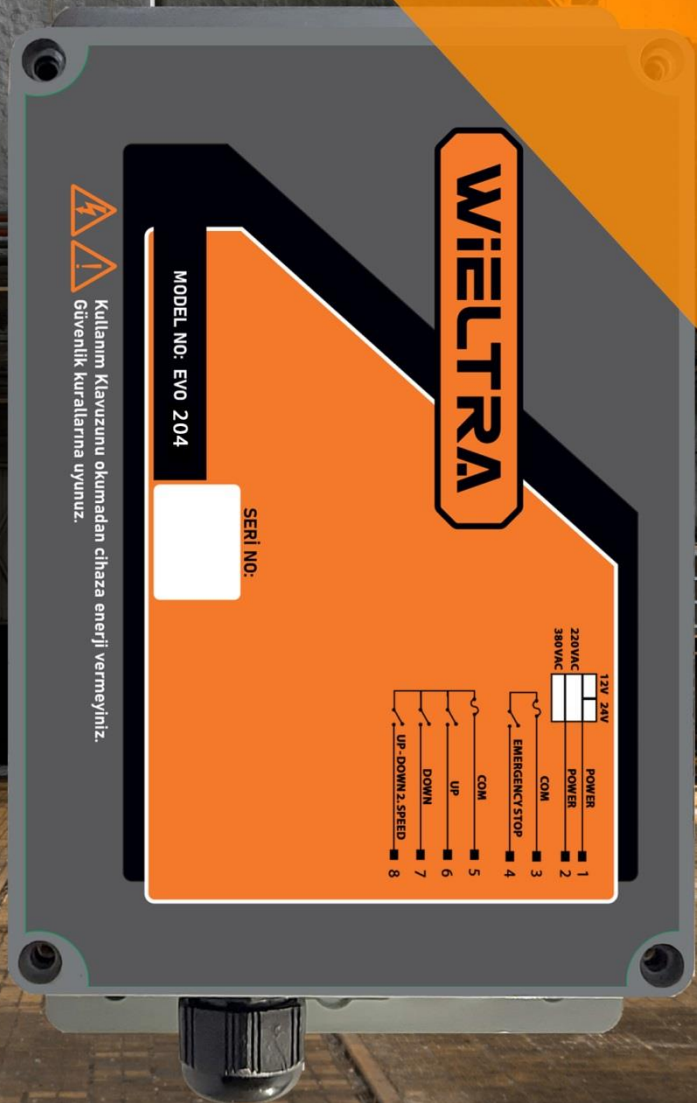


DUAL SPEED

EVO 408 REMOTE CONTROL UNITS

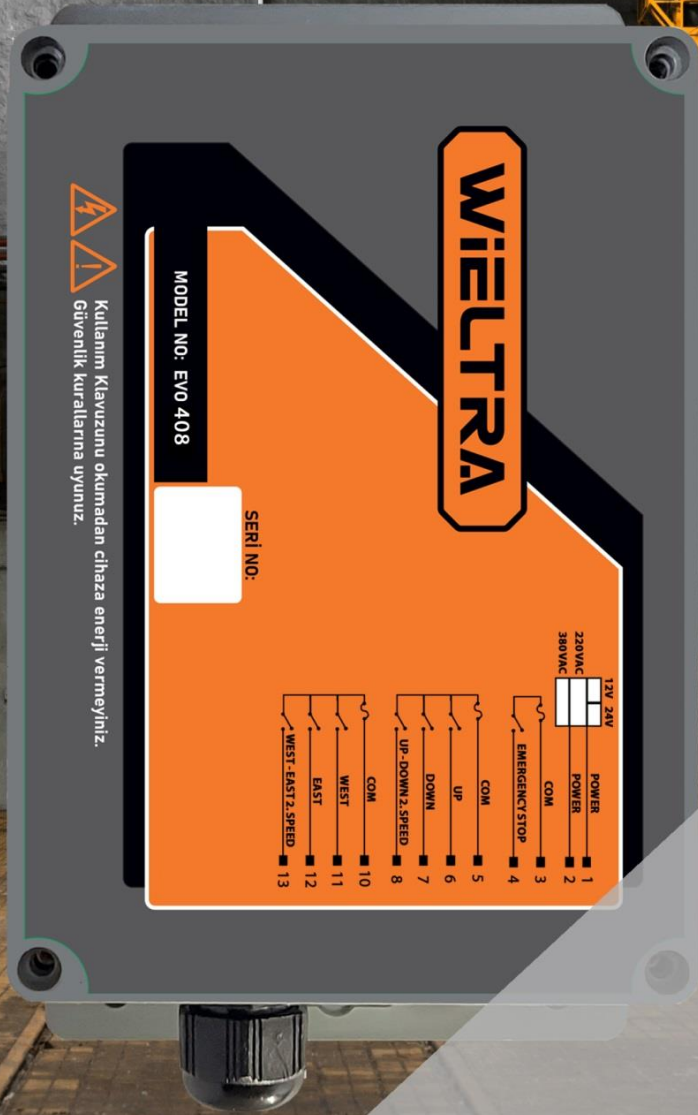

DUAL SPEED

EVO 612 REMOTE CONTROL UNITS

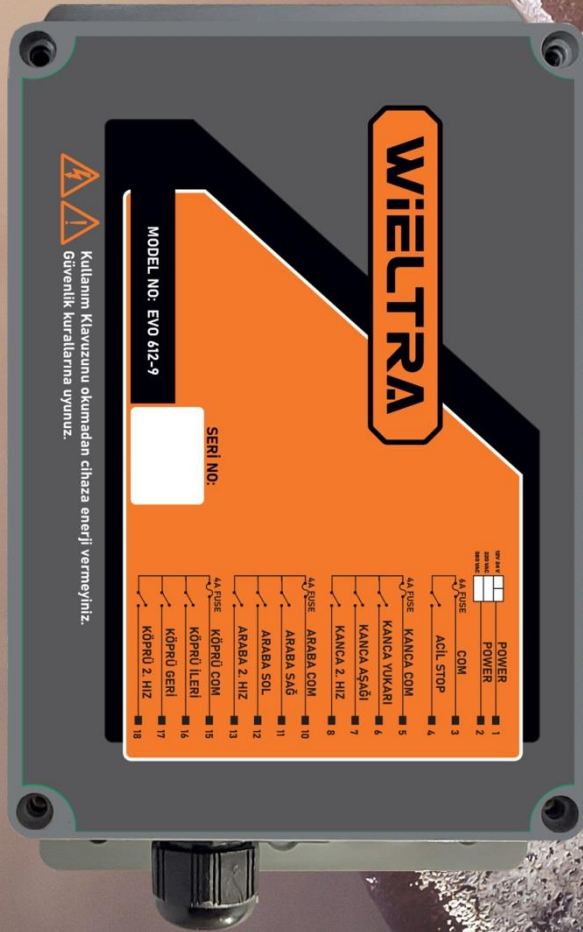


DUAL SPEED



TRANSMITTER UNIT TECHNICAL SPECIFICATIONS

Operating Temperature Range	: -35 to 80 C°
Plastic Body Structure	: GFR
Protection Class	: IP65
Weight (Including Battery)	: 325 Gr
Low Battery Alert	: There is
Working Distance	: 150 meter
Radio Frequency Power	: 10dbm
Number of Channels	: 80
Command Response Time	: 30 ms
Average Battery Consumption	: 8 mA
Dimensions	: 180*60*46 mm

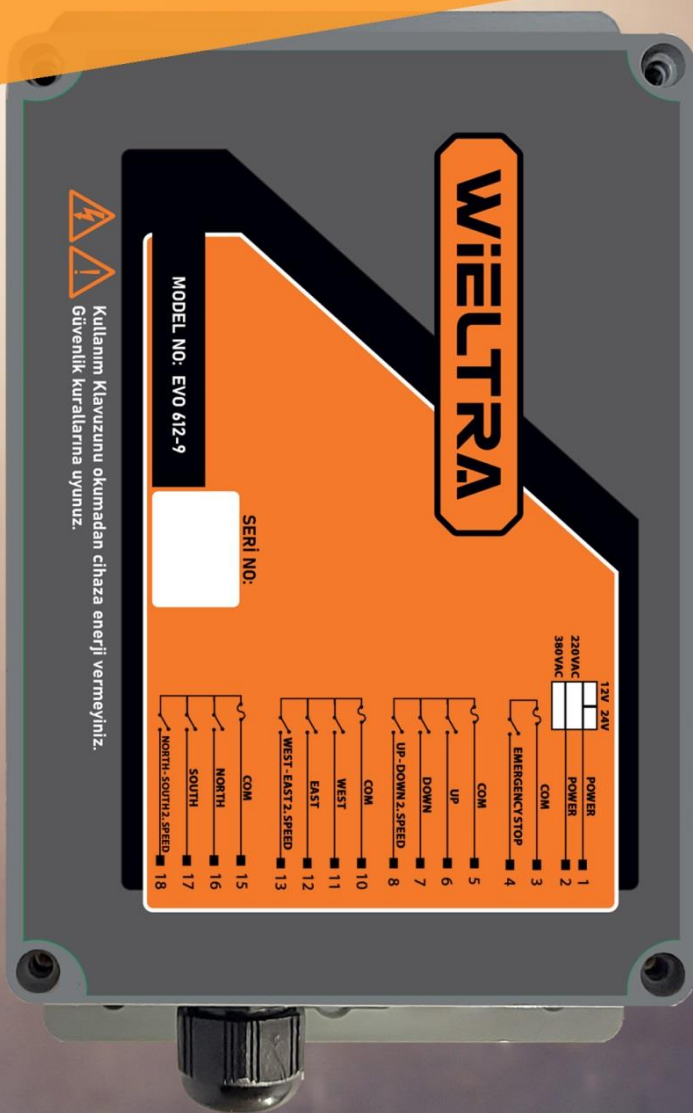

RECEIVER UNIT GENERAL FEATURES

Operating Temperature Range	: -35 to 80 C°
Plastic Body Structure	: ABS
Protection Class	: IP65
Weight	: 1,35 KG
Operating Voltage	: 180-230V AC 50 Hz
Relay Contacts	: 5A 250VAC/30VDC
Dimensions	: 210*123*56 mm